


# G50/AG150/GB50 Desktop Remote Controller

More and more customers are using the G50/GB50 controller directly from their computers, so Mitsubishi Electric has launched a new, even simpler alternative which presents the customer with what looks like a standard remote controller interface - on their PC desktop. Called the PAR-21PC, the new application can also be minimised in the Desktop Toolbar, just like other Windows applications, so that the customer can have immediate control with just one click of the mouse.

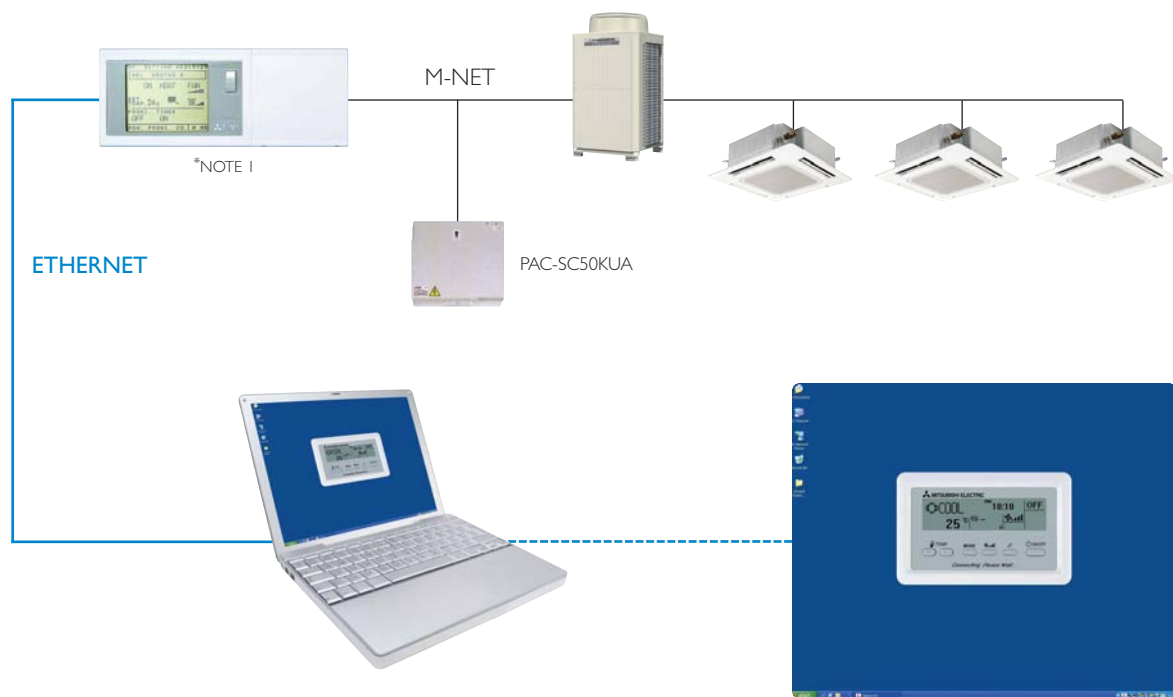

## Technical Information

| PAR-21 PC Desktop Remote Controller |  |
|-------------------------------------|--|
| FUNCTION                            | DESCRIPTION  |
| OPERATION PLATFORM                  | Pentium III, CPU 1000 Mhz, 256 MB RAM, 6GB or more. Internal LAN 10/100 MBps running Windows Professional 2000 service pack 4 or Windows Professional XP service pack 2 or Windows Vista |
| MAX No. OF INDOOR UNITS             | Up to 16 indoor units within a group   |
| ON/OFF                              | Run and Stop operation for a single group  |
| MODE SELECTION                      | Switches between Cool/Dry/Auto/Fan/Heat. Operation Mode will vary depending on the indoor unit. Auto mode is available with only R2 and WR2 systems                                      |
| TEMPERATURE SETTING                 | Sets the groups temperature control. Cool/Dry: 19-30°C, Heat: 17-28°C, Auto: 19-28°C   |
| FAN SPEED SETTING                   | 4 speed: Lo-Mi1-Mi2-Hi, 2 speed: Lo-Hi   |
| AIR FLOW DIRECTION                  | Air Flow angles: 100°-80°-60°-40° and auto swing   |
| CLOCK DISPLAY                       | Displays the time on the desktop controller  |
| INDOOR RETURN AIR TEMPERATURE       | Displays the measured intake temperature from each group   |
| ERROR INDICATION                    | Displays a 4 digit code and the affected unit address.   |
| TIMER OPERATION                     | Weekly. Maximum of 3 time sequences with 3 Start/Stop times per day for all groups can be allocated  |

\*NOTE 1: Applicable with G50 / PAC-SC50KUA or AG150 / PAC-SC51KUA or GB50 / PAC-SC50KUA