


## Wireless remote controller PAR-FL32MA / PAR-FA32MA



PAR-FL32MA




PAR-FA32MA



PAR-SA9FA  
(4-way Cassette signal receiver)

### Example of system configuration

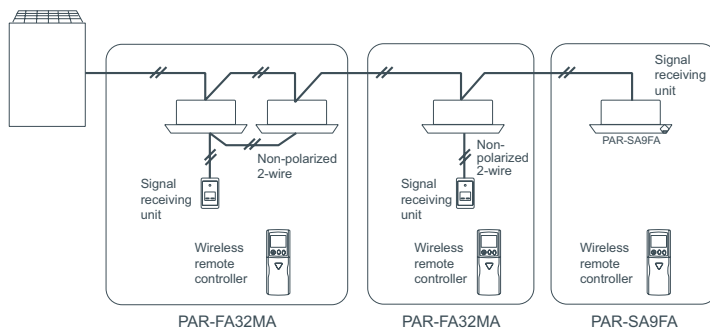

- No need to configure addresses for group operation.
- Lit LED keeps you informed of operation - blinking even gives you the error code via the number of blinks.
- Can be used with the MA remote controller.
  - \*When used in group configurations, wiring between indoor units is required.
  - \*Combining ME remote controller and/or LOSSNAY remote controller in a group is not possible.
- LCD temperature setting and display in 1°C /1°F increments.
- Dimensions:58(W) x 159(H) x 19(D) mm  
:2-5/16(W) x 6-5/16(H) x 3/4(D) in.

### Correspondence table

	receiver	transmitter
PMFY-P VBM	PAR-FA32MA	PAR-FL32MA
PLFY-P VCM/ VLMD		
PCFY-P VKM		
PFFY-P VKM		
PEFY-P VMR-E-L/R/ VMH		
PFFY-P VLEM/VKM/VLRM/VLRMM		
PEFY-P VMS1(L)		
PEFY-VMA(L)	PAR-SA9FA-E	
PLFY-P VBM-E		
PKFY-P VBM-E	Built-in	
PKFY-P VHM/VKM		